



INSTALLATION MANUAL



FLUENCE

In-Dash Car Multimedia System



1 The original head unit before installation.



2 Take out the top frame of the original small screen.



3 Unplug the back harness of the original small screen, and take out the units. Keep the Iron Buckle on the back separately.



4 Remove the panel on the top of Glove box.



5 Remove the decorative trim shown on the picture.




6 Open the cover of glove compartment, remove two screws on the top




7 Take out the original CD and keep the side bracket separately.



8 Pull the DVD connector out as showed on the picture (inside the dashboard) .

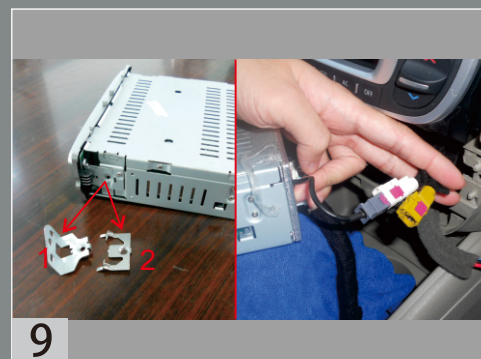

9 Fix the original side bracket on the unit, and connect the radio antenna (in the back of the DVD loader) to the original white connector.

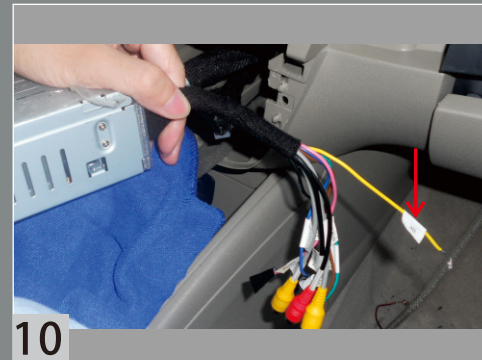

10 Connect the CCD+12V-OUT cable (shown on picture) to camera power cable.



11 Plug the back harness of the DVD loader.



12 Tight up the back harness.



13 Install the DVD, meantime plug the connect to the suitable place.



14 Plug the back harness of original radio and install it.



15 Install the original decorative trim.



16 Install the panel on the top of Glove box.



17 Fix the original iron buckle on the monitor, connect the IPOD cable with original cable.



18 Plug the back harness of the monitor.



19 Install the monitor.



20 Installation finished.